




- ◆ High gain, low cost circuit design
- ◆ Low profile and rugged design for outdoor use
- ◆ US Engineered
- ◆ Manufactured under strict US quality control procedures
- ◆ Fits with ARC's IES™, Integrated Enclosure Solutions SOLD SEPARATELY— Part # ARC-IE1001K99 or ARC-IE2000K01 (Gen II); ARC ABS™, Articulating Bracket Solution included with ARC-IE2000K01
- ◆ Custom Enclosures Available

ARC-IA0913B02

Electrical Specifications	
Frequency Range	902-928MHz
Gain	12.5dBi
3dB Beamwidth Vertical/Horizontal	42deg/42deg
Polarization	Single linear, horizontal or vertical
VSWR	≤1.5:1 typ., ≤1.7:1 max.
Front-to-Back Ratio	>20 dB
Cross Polarization	>25 dB
Power Rating	30 watts
Impedance	50 ohms
Lightning Protection	DC ground
Connector Type	R/A SMA Jack


Ordering Information	
Part #	Description
ARC-IA0913B02	900MHz 12.5dBi IES™, R/A SMA Jack

Shipping Information	
Sizes and Weights	Description
19in x 16in x 16in (48.3cm x 40.6cm x 40.6cm) 33lb, (14.97kg)	Bulk pack includes 10 antennas in an over pack box

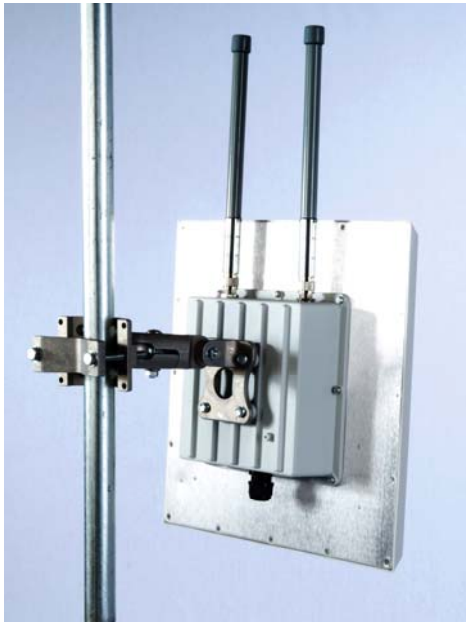

Mechanical and Environmental Specifications	
Length x Width x Depth	15.4in x 15.4in x 1.7in (39.1cm x 39.1cm x 4.3cm)
Weight	2.7lbs (1.2kg)
Backplane	Aluminum
Enclosure	Gray, Powder-coated die-cast aluminum
Radome	Gray, UV stabilized ABS plastic
Wind Survivability	125mph (201kph)
Wind Load	1.23ft ² (0.12m ²)
Operating Temperature Range	-49°F to +149°F (-45°C to +65°C)
Pole Mount Diameter Range	0.75in to 3.0in (1.9cm to 7.6cm)

RF Patterns
Vertical Cut, typ.



RF Patterns
Horizontal Cut, typ.

