

BRSAWS360D-698/1710-2

Dual Band (698-896 MHz / 1710-2155 MHz)
Single polarization Dual Input Omni

- PIM Rated
- Pultruded Fiberglass Radome
- Frequency coverage for entire 700, 850 and AWS bands

Electrical Specs


Frequency Range	698-896 & 1710-2155 MHz
VSWR	1.5:1 VSWR Max
Forward Gain	2 dBi for each frequency band
Polarization	Vertical
Isolation	>20 dB
Max Power Input	200 Watts
Vertical -3dB Beamwidth	75° +/- 1° (nominal)
Horizontal -3dB Beamwidth	360° +/- 5°
Azimuth Ripple	+/- .5 dB
Passive Intermod (PIM)	<-150 dBc

Mechanical & Environmental Specs

Connector Type	2 x DIN 7/16 (Two connectors)
Mounting	Side mount or over pipe
Dimensions	24" x 2.0" O.D. / < 10 lbs
Color	White

Mounting

- A BRSAWS360D-698/1710-2-T0-D Side mount; clamps provided
- B BRSAWS360D-698/1710-2-T0M-D Mounts over 2 inch O.D. pipe

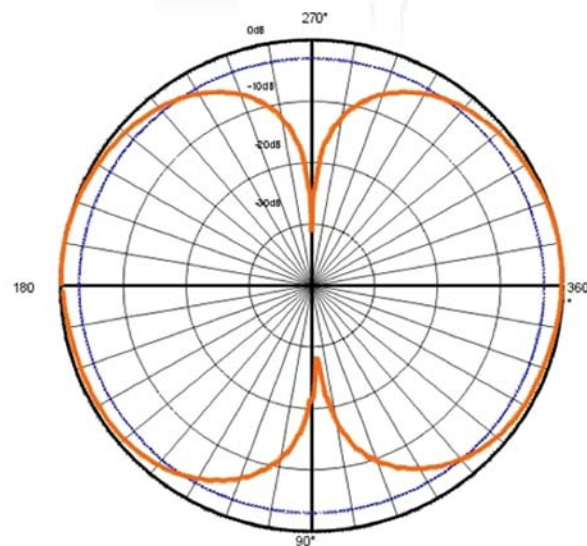

Antennaproducts.com

101 SE 25th Ave., Mineral Wells, TX 76067

phone 940-325-3301 fax 940-325-0716