


BRS360-698-6-T0-D

Rugged 700/850 MHz Omnidirectional Antenna



BRS360-698-6-T0-D
722 MHz

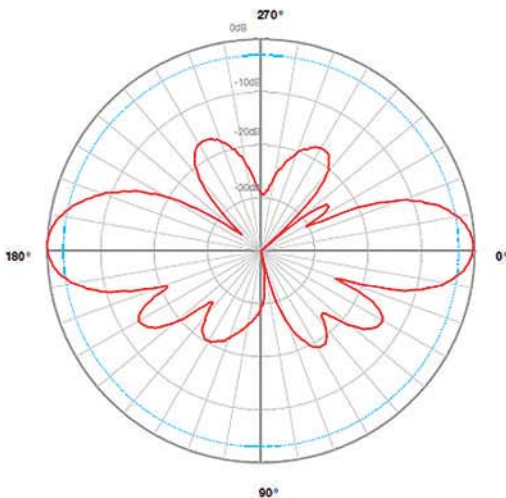

PRODUCT DESCRIPTION

Model: BRS360-698-6-T0-D

ELECTRICAL SPECIFICATIONS

Frequency Range :	698-896 MHz
VSWR:	1.7:1 Maximum
Forward Gain:	6 dBi
Polarization:	Vertical
Maximum Power Input:	200 Watts
Input Impedance:	50 ohms
Vertical -3dB BW:	20° +/- 1°
Horizontal -3dB BW:	360°
Azimuth Ripple:	+/- .5 dB

MECHANICAL & ENVIRONMENTAL SPECIFICATIONS

Connector:	DIN 7/16
Mounting:	Side mount; clamps provided
Dimensions:	48 inches x 2.0 inch O.D.
Weight:	< 3 lbs.
Color:	White Standard (Color Options Available)
Wind Survival :	120 mph.
Lightning Protection:	Direct Ground